



Product Data Sheet

STEPMASTER STAIRNOSINGS

STEPMASTER 100 SERIES (SMN112)

SPECIFICATIONS

PRODUCT	Stepmaster 100 Series SMN112
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	68mm
FRONT DEPTH	10mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Solid Epoxy Based Carborundum – Heavy Duty, External Grade
INSERT WIDTH	54mm
INSERT COLOURS	Black, Safety Yellow, Grey, Red, Luminescent – other colours on request.
INSERT SLIP RATING	P5 Classification (Highest available)
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
FEATURES	Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings
APPLICATION	Surface mounted on hard floor finishes – Concrete, Timber etc.
OPTIONS	Available in black anodised aluminium

STANDARD COLOURS

Other colours available on request



BLACK




SAFETY YELLOW



GREY



RED




LUMINESCENT



LUM + BLACK


PROFILE



A 68mm

B 10mm

TYPICAL INSTALLATION METHOD

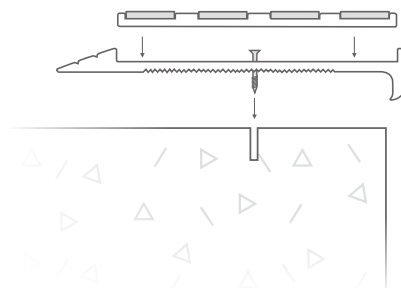

STEPMASTER STAIRNOSING

“Defines the Lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.