



Product Data Sheet

STEPMASTER STAIRNOSINGS

STEPMASTER 400 SERIES (SMN413)

SPECIFICATIONS

PRODUCT	Stepmaster 400 Series SMN413
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	58mm
FRONT DEPTH	10mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum Tape – Heavy Duty External Grade
INSERT WIDTH	54mm
INSERT COLOURS	Black, Safety Yellow, Grey, White
INSERT SLIP RATING	P5 Classification
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
FEATURES	Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings
APPLICATION	Recessed into tread for flush finish
OPTIONS	Available in black anodised aluminium

STANDARD COLOURS

Other colours available on request



BLACK




SAFETY YELLOW



GREY


PROFILE



A 58mm

B 10mm

TYPICAL INSTALLATION METHOD

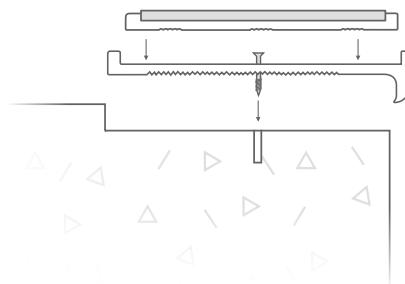

STEPMASTER STAIRNOSING

“Defines the Lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.