



Product Data Sheet

STEPMASTER STAIRNOSINGS

STEPMASTER 400 SERIES (SMN419)

SPECIFICATIONS

| | |
|--------------------|--|
| PRODUCT | Stepmaster 400 Series SMN419 |
| BASE MATERIAL | Alloy: 6060, Temper: T5 |
| FINISH | Clear Anodised – 25Um |
| TREAD WIDTH | 120mm |
| FRONT DEPTH | 10mm |
| TREAD THICKNESS | 4.8mm |
| INSERT TYPE | Carborundum Tape – Heavy Duty, External Grade |
| INSERT WIDTH | 54mm Front, 20mm Back |
| INSERT COLOURS | Black, Safety Yellow, Grey |
| INSERT SLIP RATING | P5 Classification (Highest Available) |
| CODE COMPLIANCE | AS1428.1-2009, AS4586-2014 Check floor finish colour for luminance contrast requirements, the 20mm strip may require alternate colour insert. |
| FEATURES | Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings |
| APPLICATIONS | Surface mounted for all finishes |
| OPTIONS | Available in black anodised aluminium |

STANDARD COLOURS



BLACK




SAFETY YELLOW




GREY

TYPICAL INSTALLATION METHOD

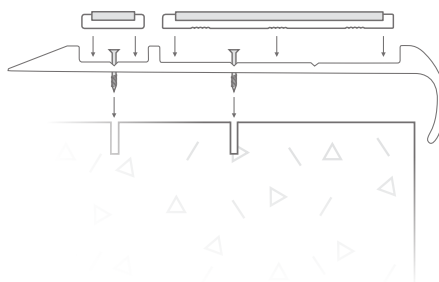

PROFILE

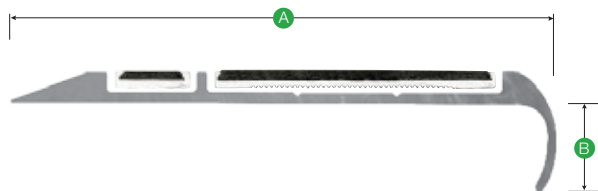

A 120mm

B 10mm

STEPMASTER STAIRNOSING

“Defines the Lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.