ARCHITECTURAL PRODUCTS
WALMAY
WWW.WALMAY.COM.AU

2 YEAR WARRANTY

Product Data Sheet
STEPMASTER STAIRNOSINGS

STEPMASTER 100 SERIES

Stepmaster offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Stepmaster Stair Nosings are manufactured to meet and exceed the Australian standards and building codes.

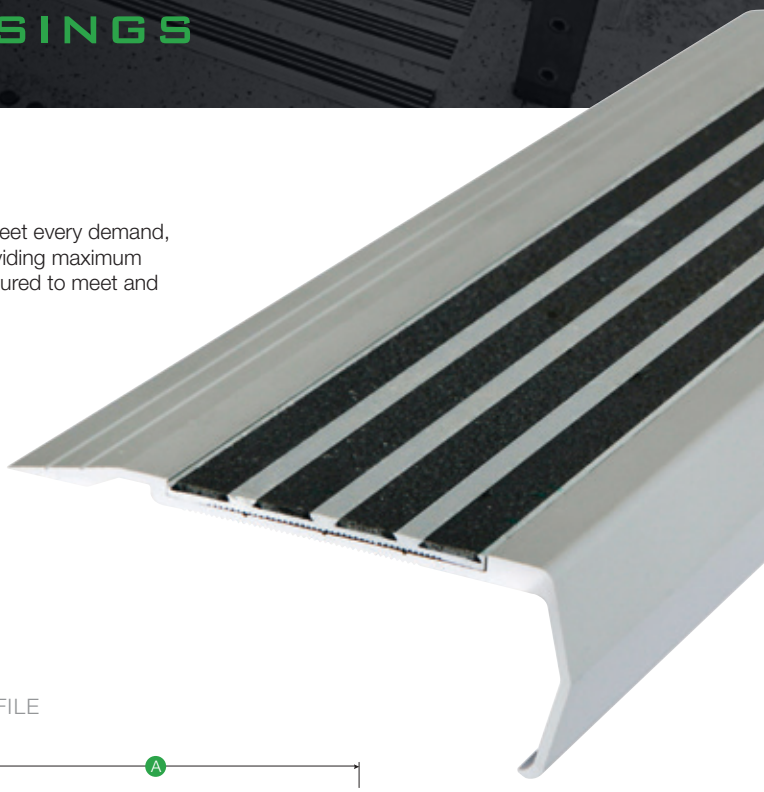

SPECIFICATIONS

PRODUCT	**Stepmaster 100 Series**
CODE	**SMN115**
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	96mm
FRONT DEPTH	35mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Solid Epoxy Based Carborundum – Heavy Duty, External Grade
PRODUCT WARRANTY	2 Years (As per Walmay's standard warranty conditions)
INSERT SLIP RATING	P5 Classification (Highest available)
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
FIXING METHOD	Screw fixed
APPLICATION	Surface mounted on hard floor finishes – Concrete, Timber etc.

PROFILE

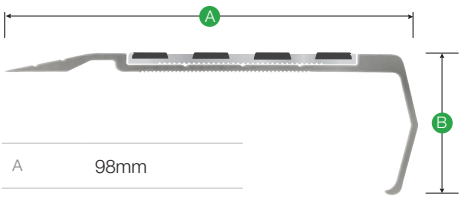

A	98mm
B	35mm

* Insert measures 54mm wide

*STANDARD COLOURS

Aluminium

CLEAR ANODISED

BLACK ANODISED

GOLD ANODISED

Insert

SAFETY YELLOW

RED

BLACK

GREY

LUMINESCENT

*Other colours available on request

TYPICAL INSTALLATION

Screw fixed

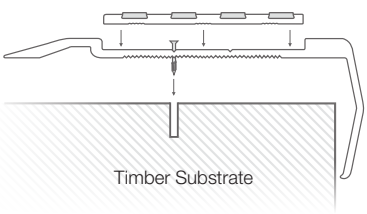

HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description
Stepmaster stairnosing profile series 100, Code: SMN115 in (Clear/Black/Sovereign Gold) anodised finish aluminium with insert colour (SY/BLK/R/G/LUM). To be installed to the manufacturer's instructions in accordance to the AS/NZS 1428.1.4.2009

Manufacturer
Walmay Architectural Products Pty Ltd
P: 1300 393 493
E: sales@walmay.com.au
W: www.walmay.com.au

Example – Typical Specification
Stepmaster stairnosing profile 100 series, SMN115 in clear anodised aluminium finish, with insert colour black.
To be installed in accordance to the manufacturer's instructions in accordance to the AS/NZS 1428.1.4.2009