



Public Buildings

Museums, civic offices, theatres, event areas



Education

Schools, colleges, universities



Healthcare

Hospitals, care homes, surgeries



Travel Terminuses

Railway & bus stations, airports, ports



Commercial Offices

Corporate offices, foyers, reception



Retail Stores

Retail chains, supermarkets



Shopping Centres

Shopping malls, plazas, arcades, retail parks



Leisure / Sport

Stadiums, sports centres, swimming pools




Leading the way!

Browse the full range

FRAME

SYSTEMS

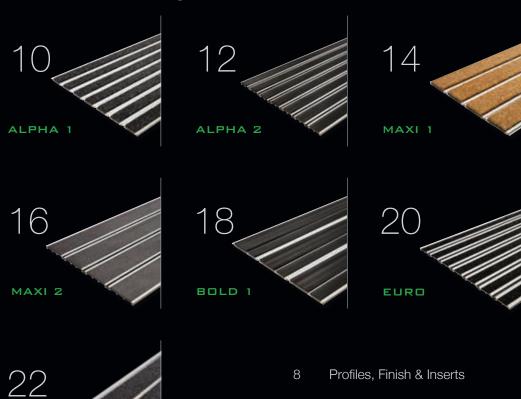

26

27

Typical Measurements & Clearance

Typical Installations & Application

Operation & Maintenance



Your partner in style, safety and function

Walmay is a family owned and operated business that has been servicing the construction and architectural industry since 1978. We pride ourselves on premium quality products, responsive service and trusted long-term partnerships.

With a proven track record and industry knowledge built up over 40 years, we stand behind our market-leading product range with expert advice, professional installation and responsive support.

Our mission is to help create safe, accessible and beautiful public spaces by partnering with architects, builders, designers, engineers and contractors.

Our comprehensive product range includes:



Stair Nosings



Entrance Matting



Tactile Indicators



Floor Trims




Car Park Accessories



Street Furniture

We understand that every project you work on becomes part of your portfolio. That's why we take the same pride, care and attention to detail that you do in terms of aesthetics and function.

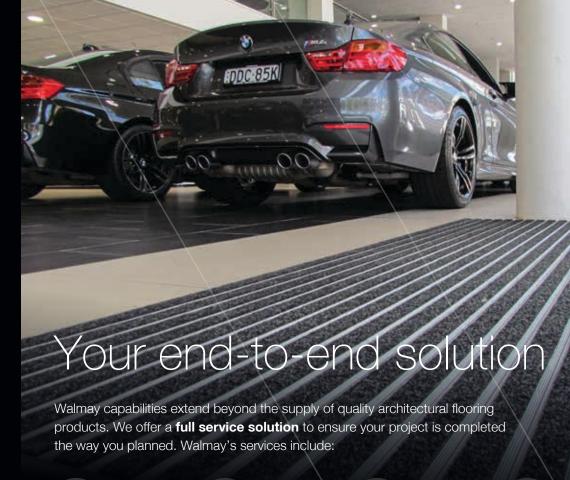



Expert advice

Onsite or in our showroom, our expert consultants are happy to offer pre-sales advice on product selection and options.



Free comprehensive quotes

We'll work with you to analyse your plans, calculate quantities and provide detailed investment options to meet your objectives.



Customised products

So much more than just a delivery, your products are supplied cut to size, prepared and kit-packed ready for installation.




Rapid delivery

With a fully-stocked local warehouse, we'll get you the right products when and where you need them.



Professional installation

While our products are simple to install yourself, we also offer full installation by our experienced team.

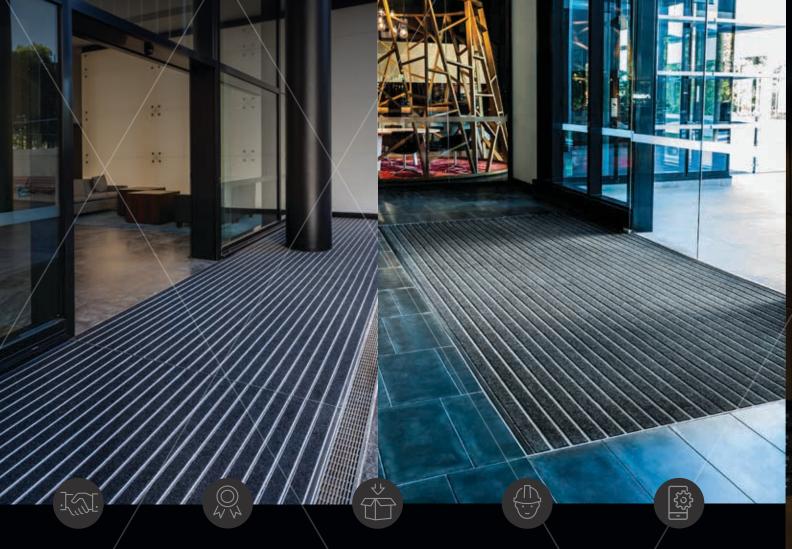

Service and support

Led by your dedicated customer service manager, our experienced and responsive team is always here to ensure your project's success.

Quality assurance

Our products are manufactured to meet Australian standards and building codes, including full warranties and certificates.

Complimentary samples

If you want to get hands-on with the products before selecting, we can typically dispatch samples on the same day.

Project management

As needed, we can offer full onsite management and supervision during installation to ensure everything runs to plan.

End-to-end reporting

With a streamline system for specifications, quotes, delivery, installation and support, we'll keep you updated every step of the way.

Walmay in action

From shopping centres, universities and hospitals through to offices, stadiums and airports, we are proud to have products installed in hundreds of world-class projects across Australia. Walmay is trusted by some of Australia's leading brands and prestigious addresses.

For comprehensive project list please visit Walmay's website.





Monumat Entrance Matting

The Monumat brand of Entrance Matting Systems is a unique range that combines up-to-date design and aesthetics with the ability to suit the most demanding environments. Walmay has become an industry specialist with intimate knowledge of the requirements for the marketplace whilst providing optimum performance, every time.

Key features include:

- Simple self-installation (or we offer installation)
- Unique hidden fixings for a sleek look
- Strong and durable anodised finish (colour matching available)
- Wide and customisable range of colours, profiles, bases and inserts
- ldeal for stone, tile, timber, concrete, pavers, vinyl, carpet and more
- Options for all substrate applications
- Suitable for new or existing construction
- Non-toxic abrasive interchangeable inserts
- Compliant with Australian Standards (WHS, OH&S)
- Backed by a full warranty across the range

Got questions? Call us on 1300 393 493 or head to walmay.com.au for product data sheets or to request product samples.



The Monumat Range was pioneered in 1999 and has been installed into many prestigious building entrances ever since whilst being fully backed by a 20 Year Written Warranty.

Walmay recognises the need for Entrance Matting to enable safe and easy access at all times for all people without discrimination. To that end, strict measures are taken to ensure that products within the Monumat Range are fully compliant.

Therefore, Monumats are specified and used with confidence internationally.

Manufactured in Australia to standard and custom shapes including; curves, circular, semicircular and irregular designs, there is something to suit every entrance!

Typical Installations Include:

- Corporate & commercial office buildings
- Shopping plazas
- Airports
- Schools, colleges & universities
- Hospitals & aged care facilities
- Public domains libraries etc
- Residential apartments and student accommodation



Monumat Entrance Matting

PROFILES
FINISHES
& INSERTS

Choose your Profile

ALPHA 1

This profile utilises an aluminium tread rail with ball and socket hinge system for superior strength. Designed to retain 31mm insert and rubber backed for quieter transition. This makes it an ideal profile for use in educational facilities, commercial buildings and retail outlets.



See page 10

ALPHA 2

This profile utilises an aluminium tread rail with a flexible rubber joiner. The rubber joiner can be punched with specially placed holes to assist in the drainage of the mat well area. Designed to retain 31mm insert with various options available.

An ideal profile for use in educational facilities, commercial buildings and retail outlets where water drainage is a priority.



See page 12

MAXI 1

This profile utilises an aluminium tread rail with ball and socket hinge system for superior strength. Designed to retain 60mm insert which allows for a smoother crossing of wheeled traffic such as walking aids, health care beds and trolleys. This profile is also rubber backed for a quieter transition. Ideal for healthcare facilities or areas with a high volume of wheeled traffic.



See page 14

MAXI 2

This profile utilises an aluminium tread rail with flexible rubber joiner. Designed to retain 60mm insert which allows for a smoother crossing for wheeled traffic such as walking aids, health care beds and trolleys. The rubber joiner can be punched with holes at 60mm or 120mm centres to assist in the drainage of the mat well area. Ideal for healthcare facilities or areas with a high volume of wheeled traffic that requires particular attention to drainage.



See page 16

BOLD 1

This profile utilises an aluminium tread rail and a combination of both Alpha and Maxi profiles providing a greater scope for colour matching and insert options. Ideal for locations that require a high emphasis on aesthetic coordination with the surrounding décor.



See page 18

EURO

This profile utilises an aluminium tread rail with flexible rubber joiner similar to the Alpha 2 profile. However it has a wider tread rail and narrower insert than other profiles making it more cost effective. Therefore this is an ideal profile for budget solutions.



See page 20

Choose your Finish

CLEAR ANDDISED

A process for producing a translucent film of aluminum oxide which forms an integral part of the aluminum. This creates a very thin coating of immense hardness. Standard anodising is 15-20um (microns).



BLACK ANDDISED

Follows the same process as clear anodising but the aluminium is immersed into a tank full of dye which absorbs into the pores of the anodised coating until the depth of colour is obtained.



GOLD ANDDISED

Follows the same process as clear anodising but the aluminium is immersed into a tank full of dye which absorbs into the pores of the anodised coating until the depth of colour is obtained.



Choose your Insert

STEP

Marine grade commercial carpet insert specifically manufactured so it will not harbour mildew or rot whilst removing moisture, grit and grime from footwear. Rubber backed with a high degree of UV protection for heavy duty use and longevity of colour. Suitable for both internal and external applications. Ideal for locations with a large focus on aesthetic value.



GRIP

Grip is a combination of carborundum grit and epoxy creating a premium product that provides a safe, anti-slip finish. Ideal for locations where slip risk is high.





BRUSH

Brush is a synthetic fibre which is made to imitate natural Coir. The synthetic nature of the insert combined with rubber backing results in a highly durable product. Suitable for both internal and external applications. Ideal for locations that require a natural look and feel or Federation refurbishments.



NATURAL 141



BLACK 142

TRED

Tred is a ribbed aprene (rubber) insert that provides greater capacity and effectiveness in removing larger particles from footwear. Ideal for hard wearing conditions such foot traffic off an unpayed area.



RL ACK 132





31mm Wiper Insert - Aluminum Connector Hinge

The Monumat Alpha Entrance Matting System has been designed and engineered to provide a solution for every high traffic entrance, giving architectural dominance whilst offering superior protection against the intrusion of moisture, corrosive grit and grime.

KEY FEATURES

- Recessed or surface mounted
- Option of Marine Grade Carpet, Ribbed Aprene, Carborundum Grit or Coir inserts
- 31mm wide inserts
- Heel proof Closed construction
- Roll up design for ease of care and maintenance
- Full aluminium body and hinge detail for superior structural strength
- Suitable for all high traffic entries

YEAR WARRANTY

Shown: Monumat Alpha 1 with clear anodised finish & Step insert in charcoal 110.











А	31mm
В	50mm
С	12mm
С	(AlphaBrush) 17mm

PRODUCT	Alpha 1
CODE	Step (02-AS1), Tred (02-AT1), Grip (02-AG1), Brush (02-AB1)
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	50mm wide treadrail with 31mm wide inserts
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25
SUPPORT CHASSIS	Anodised aluminium
CONNECTION	Interlocking hinge (ball and socket)
CODE COMPLIANCE	AS1428.1-2009
FIRE RATING	Refer to walmay.com.au
PRODUCT WARRANTY	20 Years (As per Walmay's standard warranty conditions)
DRAINAGE HOLES	Not available

INSERTS & COLOURS

Step* Carpet, UV Stabilised, Marine grade





Tred Ribbed Aprene













NATURAL 141

Brush

Course Carpet, UV Stabilised

BLACK 142

BLUE 126

YELLOW 129

Treadrail Finishes*



^{*}Additional colours available on request

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Alpha-(Step/Tred/Grip/Brush) 1 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Manufacturer

Walmay Architectural Products Pty Ltd Р 1300 393 493

E sales@walmay.com.au

w www.walmay.com.au

Example - Typical Specification

Monumat Alpha-Step 1 profile in clear anodised finish aluminium with charcoal insert to be installed within MF1235 clear anodised aluminium perimeter frame.

Specification guide shown on all Walmay product datasheets. Find them on walmay.com.au





31mm Wiper Insert - PVC Connector Hinge

The Monumat Alpha Entrance Matting System has been designed and engineered to provide a solution for every high traffic entrance, giving architectural dominance whilst offering superior protection against the intrusion of moisture, corrosive grit and grime.

KEY FEATURES

- Recessed or surface mounted
- Option of Marine Grade Carpet, Ribbed Aprene, Carborundum Grit or Coir inserts
- 31mm wide inserts
- Heel proof Closed construction
- Roll up design for ease of care and maintenance
- Full aluminium body and hinge detail for superior structural strength
- Rubber joiner system
- Option for drainage holes for use with drained matwells
- Suitable for all high traffic entries




Shown: Monumat Alpha 2 with clear anodised finish & Tred insert in black 132.












А	31mm
В	50mm
С	12mm
С	(AlphaBrush) 17mm



Specification guide shown on all Walmay product datasheets. Find them on walmay.com.au

PRODUCT	Alpha 2
CODE	Step (02-AS2), Tred (02-AT2), Grip (02-AG2), Brush (02-AB2)
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	50mm wide treadrail with 31mm wide inserts
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25
SUPPORT CHASSIS	Anodised aluminium
CONNECTION	PVC Joiner with interlocking hinge
CODE COMPLIANCE	AS1428.1-2009
FIRE RATING	Refer to walmay.com.au
PRODUCT WARRANTY	20 Years (As per Walmay's standard warranty conditions)
DRAINAGE HOLES	Available See page 26

INSERTS & COLOURS

Step* Carpet, UV Stabilised, Marine grade



Brush

Course Carpet, UV Stabilised

BLACK 142

BLUE 126



Tred Ribbed Aprene





Carborundum Grit









NATURAL 141

Treadrail Finishes*



^{*}Additional colours available on request

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Alpha-(Step/Tred/Grip/Brush) 2 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Manufacturer

Walmay Architectural Products Pty Ltd Р 1300 393 493

E sales@walmay.com.au

w www.walmay.com.au

Example - Typical Specification

Monumat Alpha-Step 2 profile in clear anodised finish aluminium with charcoal insert to be installed within MF1235 clear anodised aluminium perimeter frame.





60mm Wiper Insert - Aluminum Connector Hinge

Monumat Maxi has been specifically designed for wheeled traffic such as walking aids and shopping trolleys etc. giving a smoother transition whilst providing greater wiping area. These specially designed features have brought the Monumat Maxi to the forefront in Health Care matting.

KEY FEATURES

- Recessed or surface mounted
- Option of Marine Grade Carpet, Ribbed Aprene, Carborundum Grit or Coir inserts
- 60mm wide inserts providing 25% more surface area for ultimate cleaning and drying of shoes
- Heel proof Closed construction
- Roll up design for ease of care and maintenance
- Full aluminium body and hinge detail for superior structural strength
- Suitable for all high traffic entries

20 YEAR WARRANTY


Shown: Monumat Maxi 1 with clear anodised finish & Step insert in charcoal 110.











А	60mm
В	78mm
С	12mm
С	(MaxiBrush) 17mm

PRODUCT	Maxi 1
CODE	Step (02-MS1), Tred (02-MT1), Grip (02-MG1), Brush (02-MB1)
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	78mm wide treadrail with 60mm wide inserts
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25
SUPPORT CHASSIS	Anodised aluminium
CONNECTION	Interlocking hinge (ball and socket)
CODE COMPLIANCE	AS1428.1-2009
FIRE RATING	Refer to walmay.com.au
PRODUCT WARRANTY	20 Years (As per Walmay's standard warranty conditions)
DRAINAGE HOLES	Not available

INSERTS & COLOURS

Step* Carpet, UV Stabilised, Marine grade



Brush

Course Carpet, UV Stabilised

BLACK 142

BLUE 126



Tred Ribbed Aprene













NATURAL 141

Treadrail Finishes*



^{*}Additional colours available on request

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Maxi-(Step/Tred/Grip/Brush) 1 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Manufacturer

Walmay Architectural Products Pty Ltd Р 1300 393 493

E sales@walmay.com.au

w www.walmay.com.au

Example - Typical Specification

Monumat Maxi-Step 1 profile in clear anodised finish aluminium with charcoal insert to be installed within MF1235 clear anodised aluminium perimeter frame.

Specification guide shown on all Walmay product datasheets.

Find them on walmay.com.au





60mm Wiper Insert - PVC Connector Hinge

Monumat Maxi has been specifically designed for wheeled traffic such as walking aids and shopping trolleys etc. giving a smoother transition whilst providing greater wiping area. These specially designed features have brought the Monumat Maxi to the forefront in Health Care matting.

KEY FEATURES

- Recessed or surface mounted
- Option of Marine Grade Carpet, Ribbed Aprene, Carborundum Grit or Coir inserts
- 60mm wide inserts providing 25% more surface area for ultimate cleaning and drying of shoes
- Heel proof Closed construction
- Roll up design for ease of care and maintenance
- Full aluminium body and hinge detail for superior structural strength
- Rubber joiner system
- Option for drainage holes for use with drained matwells
- Suitable for all high traffic entries

20 YEAR WARRANT

Shown: Monumat Maxi 2 with clear anodised finish & Step insert in charcoal 110.












А	60mm
В	78mm
С	12mm
С	(MaxiBrush) 17mm



Specification guide shown on all Walmay product datasheets. Find them on walmay.com.au

PRODUCT	Maxi 2
CODE	Step (02-MS2), Tred (02-MT2), Grip (02-MG2), Brush (02-MB2)
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	78mm wide treadrail with 60mm wide inserts
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25
SUPPORT CHASSIS	Anodised aluminium
CONNECTION	PVC Joiner with interlocking hinge
CODE COMPLIANCE	AS1428.1-2009
FIRE RATING	Refer to walmay.com.au
PRODUCT WARRANTY	20 Years (As per Walmay's standard warranty conditions)
DRAINAGE HOLES	Available See page 26

INSERTS & COLOURS

Step* Carpet, UV Stabilised, Marine grade



Brush

Course Carpet, UV Stabilised

BLACK 142

BLUE 126

















NATURAL 141

Treadrail Finishes*



*Additional colours available on request

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Maxi-(Step/Tred/Grip/Brush) 2 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Manufacturer

Walmay Architectural Products Pty Ltd Р 1300 393 493

E sales@walmay.com.au

w www.walmay.com.au

Example - Typical Specification

Monumat Maxi-Step 2 profile in clear anodised finish aluminium with charcoal insert to be installed within MF1235 clear anodised aluminium perimeter frame.





60/31mm Wiper Insert - Aluminum Connector Hinge

Monumat Bold brings innovation to the forefront of Entrance Matting by combining both Alpha and Maxi profiles into one. This results in maximum protection against moisture, corrosive grit and grime.

KEY FEATURES

- Recessed or surface mounted
- Option of Marine Grade Carpet, Ribbed Aprene, Carborundum Grit or Coir inserts
- Option for alternating insert combination
- 60mm and 31mm wide inserts for even better cleaning and drying of shoes
- Smoothest transition for wheel traffic such as wheel chairs and beds in Health Care environments
- Heel proof Closed construction
- Roll up design for ease of care and maintenance
- Full aluminium body and hinge detail for superior structural strength
- Suitable for all high traffic areas




Shown: SMN910 with clear anodised finish & Step insert in clear anodised aluminium.











А	95mm
В	117mm
С	12mm
С	(BoldBrush) 17mm

Specification guide shown on all Walmay product datasheets.

Find them on walmay.com.au

PRODUCT	Bold 1
CODE	Step (02-AS2), Tred (02-AT2), Grip (02-AG2), Brush (02-AB2)
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	117mm wide treadrail with 31mm & 60mm wide inserts
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25
SUPPORT CHASSIS	Anodised aluminium
CONNECTION	Interlocking hinge (ball and socket)
CODE COMPLIANCE	AS1428.1-2009
FIRE RATING	Refer to walmay.com.au
PRODUCT WARRANTY	20 Years (As per Walmay's standard warranty conditions)
DRAINAGE HOLES	Not available

INSERTS & COLOURS

Step* Carpet, UV Stabilised, Marine grade



Brush

NATURAL 141

Course Carpet, UV Stabilised

BLACK 142

BLUE 126



Tred Ribbed Aprene













Treadrail Finishes*



^{*}Additional colours available on request

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Bold-(Step/Tred/Grip/Brush) 1 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Manufacturer

Walmay Architectural Products Pty Ltd Р 1300 393 493

E sales@walmay.com.au

w www.walmay.com.au

Example - Typical Specification

Monumat Bold-Step 1 profile in clear anodised finish aluminium with charcoal insert to be installed within MF1235 clear anodised aluminium perimeter frame.





31mm Wiper Insert - PVC Connector Hinge

Monumat Euro offers all the benefits of the Alpha 2 system however Euro has a wider Tread Rail and narrower insert giving opportunity for budget installations.


KEY FEATURES

- Recessed or surface mounted
- Option of Marine Grade Carpet or Ribbed Aprene
- Roll up design for ease of care and maintenance
- Full aluminium body and hinge detail for superior structural strength
- Suitable for all high traffic areas



Shown: Monumat Euro with clear anodised finish & Tred insert in black 132.





PROFILE



Α	32mm
В	62mm
С	12mm

SPECIFICATIONS

PRODUCT	Euro
CODE	Step (02-ES2), Tred (02-ET2),
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	31mm wide inserts. 62mm increments
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25
SUPPORT CHASSIS	Anodised aluminium
CONNECTION	PVC joiner with interlocking hinge
AVAILABLE COLOURS	1
CODE COMPLIANCE	AS1428.1-2009
FIRE RATING	Refer to walmay.com.au
PRODUCT WARRANTY	5 Years (As per Walmay's standard warranty conditions)
DRAINAGE HOLES	Not available

INSERTS & COLOURS

Step

Carpet, UV Stabilised, Marine grade



TredRibbed Aprene



Treadrail Finish



HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Euro-(Step/Tred) 2 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Manufacturer

Walmay Architectural Products Pty Ltd P 1300 393 493

E sales@walmay.com.au w www.walmay.com.au

Example - Typical Specification

Monumat Euro-Step 2 profile in clear anodised finish aluminium with Night Sky insert to be installed within MF1235 clear anodised aluminium perimeter frame.

Specification guide shown on all Walmay product datasheets. Find them on walmay.com.au





MATWELL SYSTEMS

Aluminium Entrance Mat Frame System

Multi Frame MF1235

- Aluminium Matwell Frame suitable for all Monumat Entrance Mats.
- Creates a professional division between floor finish and mat.


Ramp Frame RF1296

- Aluminium Ramp Profile for surface mounted mats.
- Transition for 12mm Entrance Mats.
- Suitable for wheeled traffic: Walking Aids, Chairs & Trolleys etc.


T-Bar Joiner TB12

- Aluminium T-Bar dividing profile for joining Entrance Mats in large Matwells.
- Provides Smooth architectural finish to mat intersections.









T-BAR JOINER TB12

PROFILE

Α	5.5mm	
В	12mm	
С	35mm	

SPECIFICATIONS

PRODUCT	Multi Frame
MATERIAL	Alloy 6064 Temper T5
FINISH	Clear Anodized or Black Anodized
HEIGHT	12mm
WIDTH	35mm
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25

PROFILE

Α	15mm
В	12mm
С	96mm

SPECIFICATIONS

PRODUCT	Ramp Frame
MATERIAL	Alloy 6064 Temper T5
FINISH	Clear Anodized or Black Anodized - 15Um
HEIGHT	12mm
WIDTH	96mm
APPLICATION	Refer to profiles usage and applications table. Page 24 & 25

ROFILE

А	5mm
В	12mm
С	20mm

PECIFICATIONS

T-Bar Joiner
Alloy 6064 Temper T5
Clear Anodized or Black Anodized
12mm
20mm
Refer to profiles usage and applications table. Page 24 & 25



Operation & Maintenance

A regular and thorough maintenance program for your Entrance Matting is essential to ensure optimal performance. Monumat products are designed to catch and hold dirt particles. Therefore, allowing build-up for long periods of time can restrict pile movement and lead to 'tracking' as the matting is continually trafficked.

Daily

Normal day-to-day soiling must be removed with a vacuum cleaner. A vacuum cleaner with a rotating brush will give the best results, helping to release dirt.

Weekly / Monthly

The matting should be carefully rolled back, section by section, and the base of the matwell thoroughly swept/vacuumed. Any debris caught in between the channels of matting should be removed and then the matting rolled back in to position. Take care not to drag the matting - it is designed to simply roll up and unroll again. Dragging the matting could cause damage.

Closed construction, non-rollable matting should follow the Daily Routine, but in addition aluminium channels with a mild detergent to help free any soiling.

Periodically

The Matting can be carefully removed from the matwell and sprayed with a high pressure water machine. Use of strong cleaning chemicals should be avoided.

Chewing Gum


Chewing gum must be removed as soon as it appears, by the use of specialist products, such as freezing sprays or gels - failure to remove gum quickly will cause it to become hardened and compacted into the matting surface reducing performance.

Specific Advice

Contact the Walmay team for specific cleaning advice on individual products and in abnormal environments. Full instructions available in Operation and Maintenance manuals.

As with all matting, when subject to heavy wheeled traffic (scissor lifts/pallet trucks etc) it should be suitably protected with plywood boarding.

For Operation & Maintenance Care Guides please visit our website at walmay.com.au

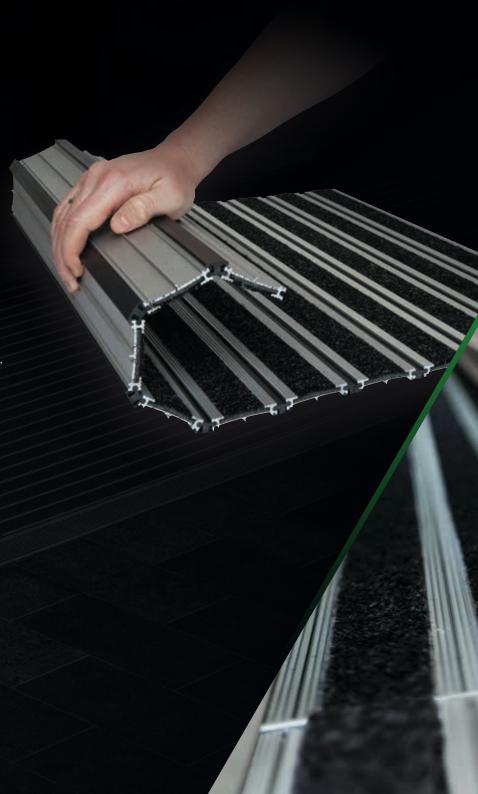





Typical Measurements & Clearance

WIDTH - LEFT TO RIGHT

Matting should cover the full width of the entrance, providing an effective barrier to remove the moisture, corrosive grit and grime from footwear entering the building.


Matting should typically extend approx. 1m beyond the entrance doors either side, or a greater distance if traffic is likely to naturally flow across the typical traffic direction – e.g. towards the reception desk or lift lobby if positioned to one side of the entrance.

DEPTH - FRONT TO REAR

The 'Front to Rear' (traffic direction) dimension of a mat is dependent on the factors above, especially the volume of traffic.


A minimum of 1.5m is recommended in low traffic areas, and between 3-6m for optimum performance in high traffic areas.

A site inspection may be required for custom shaped mats.

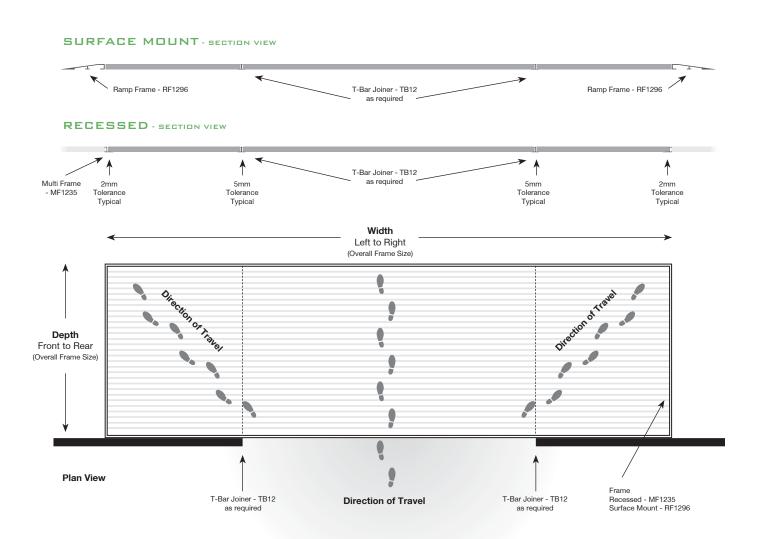


Typical Installations & Application


RECESSED APPLICATIONS




Multi Frame - MF1235



Multi Frame - MF1235




Multi Frame - MF1235



Multi Frame - MF1235


JOINING APPLICATIONS



SURFACE MOUNT APPLICATION



MATWELL DRAINAGE - SECTION VIEW

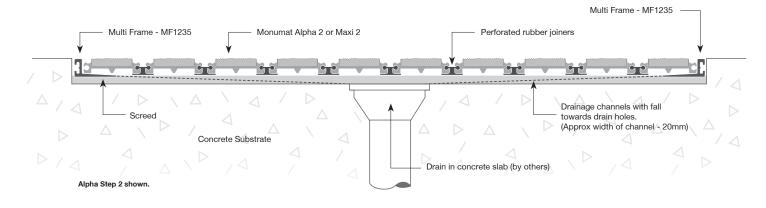

* Drawings not to scale



Entrance Matting



Stair Nosings



Tactile Indicators



Floor Trims



Car Park Accessories



Street Furniture





1300 393 493



sales@walmay.com.au



www.walmay.com.au