



Product Data Sheet

MONUMAT ENTRANCE MATTING


MAXI STEP 2 (02-MS2)

This profile utilises an aluminium tread rail with flexible rubber joiner. Designed to retain 60mm carpet insert which allows for a smoother crossing for wheeled traffic such as walking aids, health care beds and trolleys. The rubber joiner can be punched with holes at 60mm or 120mm centres to assist in the drainage of the mat well area. Ideal for healthcare facilities or areas with a high volume of wheeled traffic that requires particular attention to drainage.

SPECIFICATIONS

PRODUCT	Maxi Step 2
CODE	Step (02-MS2)
PROFILE LENGTH	Up to 6500mm modules
PROFILE WIDTH	78mm wide treadrail with 60mm wide inserts
PROFILE DEPTH	12mm
DESCRIPTION	Rollup hard wearing entrance mat with rubber backing
APPLICATION	Heavy duty - internal/external
SUPPORT CHASSIS	Anodised aluminium
TREAD SURFACE	Step - Carpet, UV Stabilised, Marine grade
CONNECTION	PVC Joiner with interlocking hinge
AVAILABLE COLOURS	Step - 8

PROFILE

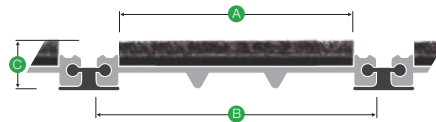

A	60mm
B	78mm
C	12mm

CHOOSE YOUR INSERT COLOUR

Step

Marine grade commercial carpet insert specifically manufactured so it will not harbour mildew or rot whilst removing moisture, grit and grime from footwear. Rubber backed with a high degree of UV protection for heavy duty use and longevity of colour. Suitable for both internal and external applications. Ideal for locations with a large focus on aesthetic value.

Other colours available on request



CHOOSE YOUR ALUMINIUM FINISH

Clear Anodised

A process for producing a translucent film of aluminum oxide which forms an integral part of the aluminum. This creates a very thin coating of immense hardness. Standard anodising is 15-20um (microns).



Black Anodised

Follows the same process as clear anodising but the aluminium is immersed into a tank full of dye which absorbs into the pores of the anodised coating until the depth of colour is obtained.



HOW TO SPECIFY

Copy the prewritten specification below and update all sections in brackets to create your project specification.

Description

Monumat Maxi-Step 2 profile in (clear/black) anodised finish aluminium with (nominate insert colour) insert to be installed within (MF1235/RF1296) (clear/black) anodised aluminium perimeter frame.

Example - Typical Specification

Monumat Maxi-Step 2 profile in clear anodised finish aluminium with charcoal insert to be installed within MF1235 clear anodised aluminium perimeter frame.