



## Product Data Sheet

# STEPMASTER STAIRNOSINGS

## STEPMASTER 400 SERIES (SMN417)

### SPECIFICATIONS

PRODUCT	<b>Stepmaster 400 Series SMN417</b>
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	74mm
FRONT DEPTH	16mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum tape – Heavy Duty, External Grade
INSERT WIDTH	54mm
INSERT COLOURS	Black, Safety Yellow, Grey
INSERT SLIP RATING	P5 Classification (Highest Available)
CODE COMPLIANCE	AS1428.1-2009, AS4586-2014 Check floor finish colour for luminance contrast requirements,
FEATURES	Pre-drilled and countersunk for secret screw fixing – Once installed, insert covers all fixings. Rebated back edge – Allows Vinyl edge to be concealed.
OPTIONS	Available in black anodised aluminium

### STANDARD COLOURS

Other colours available on request



BLACK




SAFETY YELLOW



GREY


### PROFILE

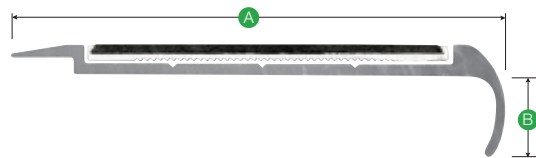

A 74mm

B 10mm

### TYPICAL INSTALLATION METHOD

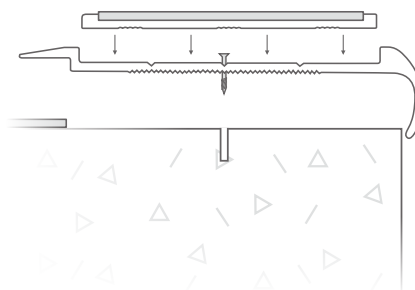

### STEPMASTER STAIRNOSING

#### “Defines the Lines”

Step Master offers a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements. Step Master Stair Nosing's are manufactured to meet and exceed the Australian standards and building codes.